




Blackberry Storm 9530 SIM Card Replacement

Need to replace your SIM card? Follow these few easy steps!

Written By: melanie lim

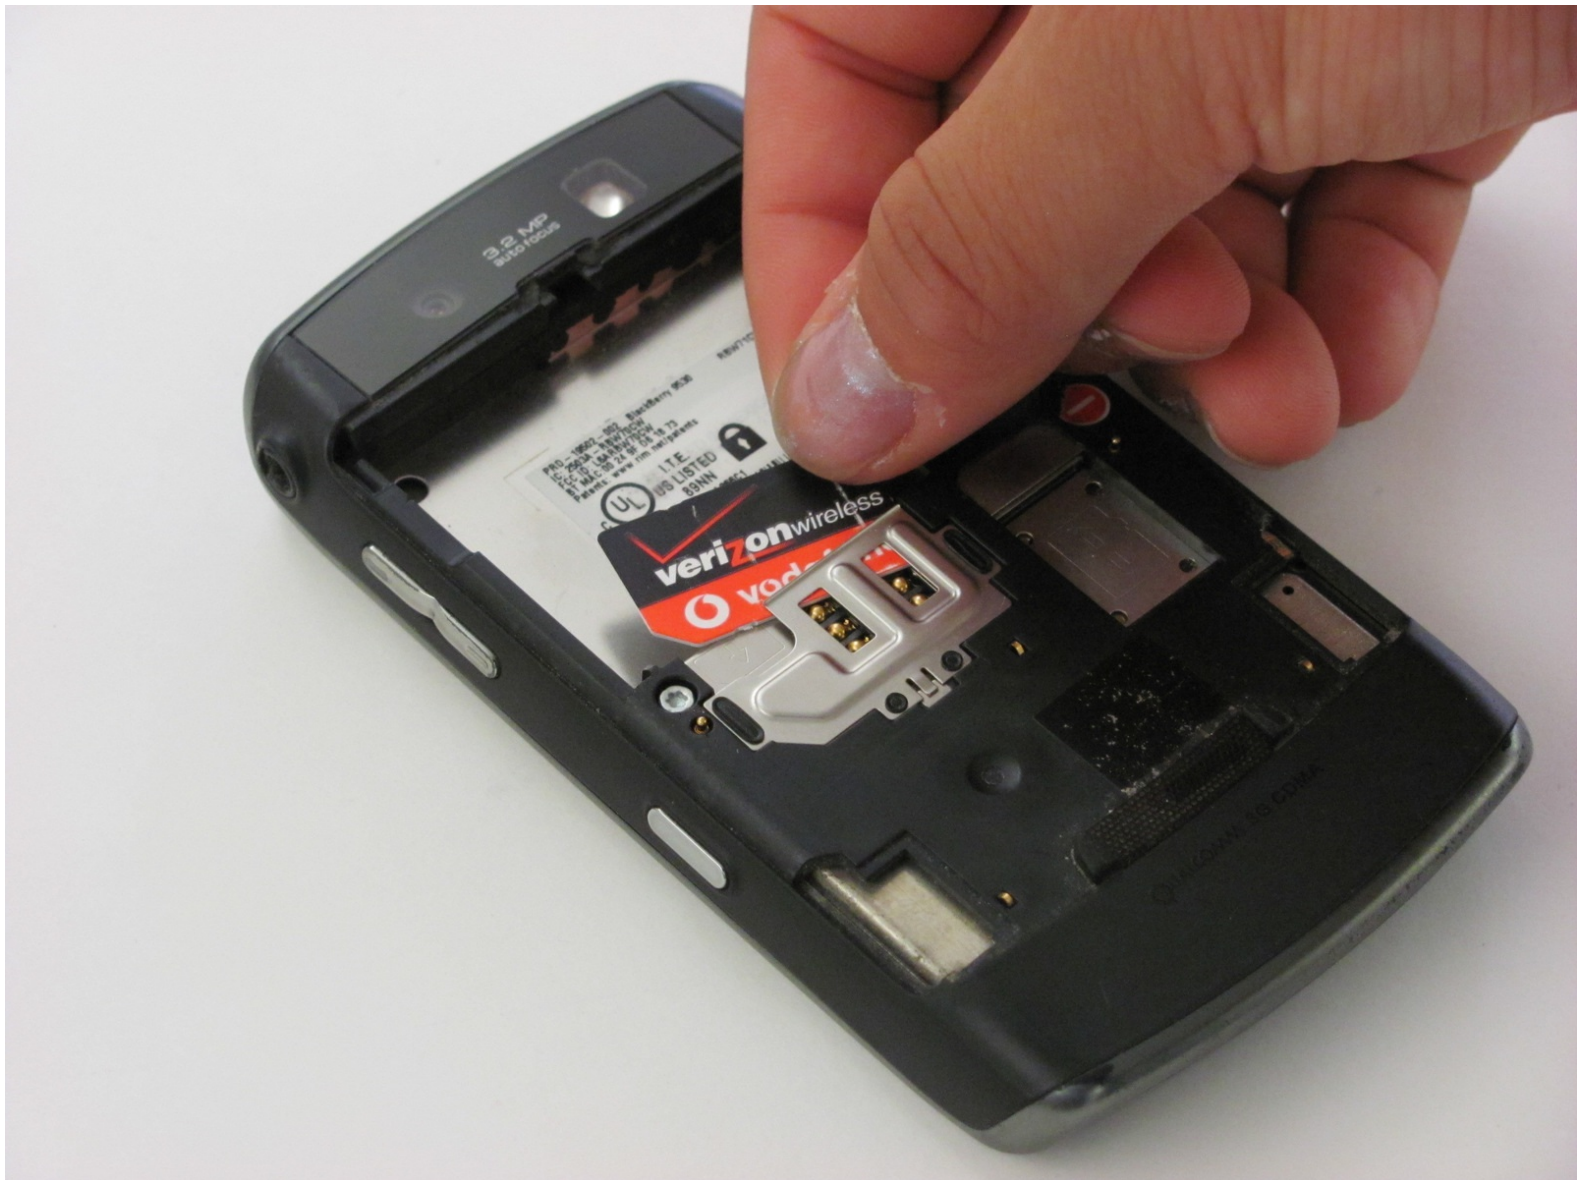

INTRODUCTION

This replacement guide will walk you through replacing your SIM card. Listed tools are recommended; however, they are not required.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back Cover Removal




- First locate the two switches located on the lower backside of the phone.
- Simultaneously, push the two switches forward causing the back to "pop" off.
- The back cover should be fully detached from the phone.

Step 2




- Once the cover has been removed, the battery should be immediately visible.
- The battery is situated in the top half of the phone.
- Using either your finger or the spudger/prying tool, remove the battery from the back of the device.
- ⓘ Your battery has a specific orientation to it. Make sure the bronze/gold colored leads are aligned with the bronze/gold colored strips on your battery before reassembling.

Step 3 — SIM Card

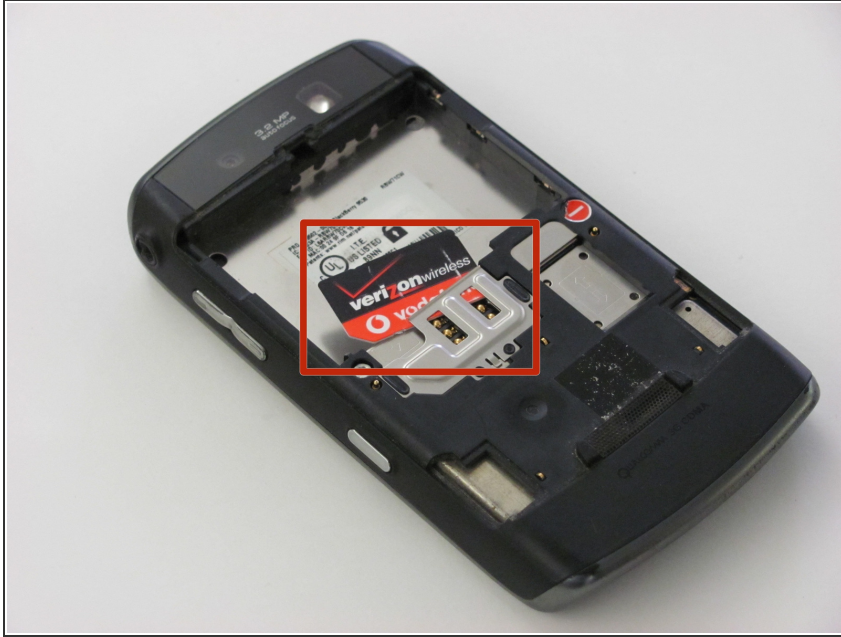

- Once the battery has been removed, locate the SIM card. The SIM card is typically located in the center of the phone, secured by a metal tray.

Step 4

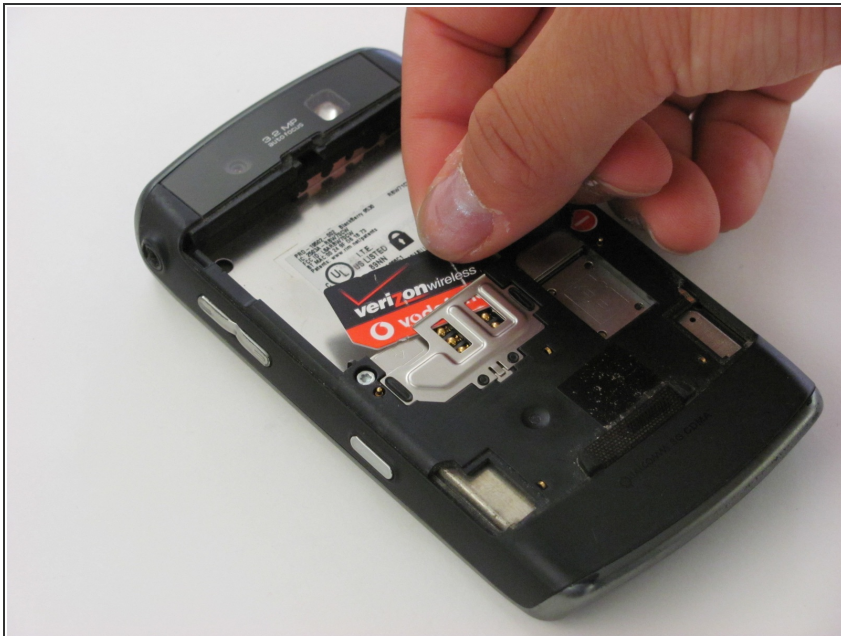

- Once you have located the SIM card, carefully remove it by sliding it upwards out of the metal tray. No tools are needed, just those fancy fingers.
- ⓘ Your SIM card has a specific orientation to it when it is replaced. Make sure the bronze/gold colored leads are aligned with the bronze/gold colored strips in the SIM card tray before reassembling.

To reassemble your device, follow these instructions in reverse order.